


Śruba zamkowa do drewna z podsadzeniem

DIN 603
ISO 8677
PN 82406

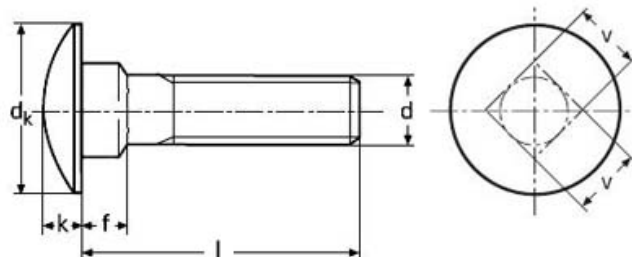

d	M 5	M 6	M 8	M10	M12	M16	M20	M24	
f	4,0	5	6	7	9	13	16	20	
k	3	3,5	5	6	7	9	11	13	
dk	13	16	20	24	30	38	46	55	
b	l < 125	16	18	22	26	30	38	46	54
	125 < l < 200	22	24	28	32	36	44	52	60
	l > 200			41	45	49	57	65	66
P	0,8	1,0	1,25	1,5	1,75	2	2,5	3	

P - skok gwintu