


Śruba z łbem walcowym z gniazdem sześciokątnym

DIN 912
 ISO 4762
 PN 82302

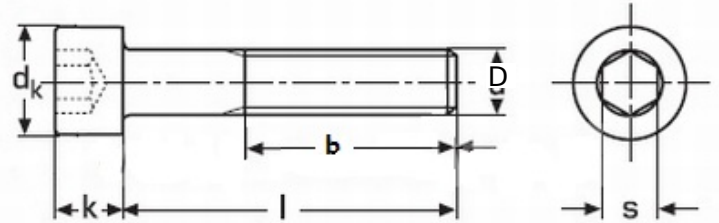

D	M3	M 4	M 5	M 6	M 8	M10	M12	M14	M16	M18
S	2,5	3	4	5	6	8	10	12	14	14
k	3	4	5	6	8	10	12	14	16	18
P	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5
dk	5,5	7	8,5	10	13	16	18	21	24	27
b	18	20	22	24	28	32	36	40	44	48

D	M20	M22	M24	M27	M30	M33	M36	M42	M48
S	17	17	19	19	22	24	27	32	36
k	20	22	24	27	30	33	36	42	48
P	2,5	2,5	3	3	3,5	3,5	4	4,5	5
dk	30	33	36	40	45	50	54	63	72
b	52	56	60	66	72	78	84	96	108

P - skok gwintu